




PRO PATCH PLUS



- ◆ QUICK SET — FLOORING INSTALLATION WITHIN 30 MINUTES
- ◆ PERFECT FOR SKIM COATING AND PATCHING APPLICATIONS
- ◆ FEATHER TO 1/2"
- ◆ FORTIFIED MIX WITH NO ADDITIVES REQUIRED

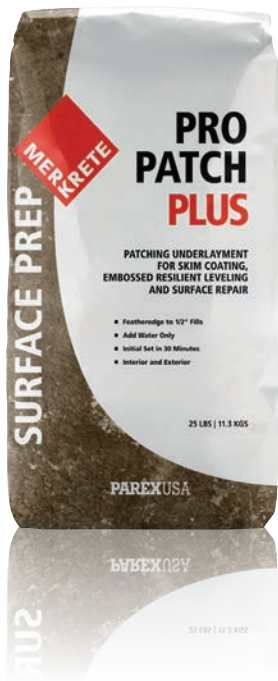

PRO PATCH PLUS



Pro Patch Plus is a quick-setting, polymer-modified, Portland cement-based skim coating compound for embossed leveling resilient floors as well as finishing and smoothing interior and exterior subfloors. Pro Patch Plus is specifically formulated to smooth out and finish substrates prior to installation of resilient flooring, carpet, ceramic tile and stone tiles.

STANDARDS:

- ASTM C627
- ASTM F710
- ASTM F1869
- ANSI A118.01
- ANSI A118.02

USES

- Featheredge to 1/2" for repairing subfloors
- Suitable for skim coating of unfinished, rough concrete
- Ideal for filling voids, holes, cracks in plywood and concrete substrates when preparing and leveling.

SUITABLE UNDERLAYMENT:

- Carpet
- Wood/Laminate
- VCT
- Sheet vinyl
- Pavers
- Stone

SUITABLE SUBSTRATES:

- Gypsum leveler
- Ceramic tile
- Prepared Terazzo
- Cutback residue
- Concrete (absorptive)
- Resilient flooring
- Embossed sheet vinyl
- Prepared moisture control membranes

APPROXIMATE COVERAGES

Thickness	Min. Coverage	Max Coverage
Skim	250 sq. ft.	750 sq. ft.
1/8"	32.5 sq. ft.	35 sq. ft.
1/4"	17.5 sq. ft.	18 sq. ft.
1/2"	8.5 sq. ft.	9 sq. ft.

ORDERING INFORMATION

Item No.	Size
2528	25 lb. bag

PAREXUSA

Parex USA, Inc., a California Corporation

Corporate Office

2150 Eastridge Ave • Riverside, CA 92507

merkrete.com • 866-516-0061

Tech Support: 800-226-2424